
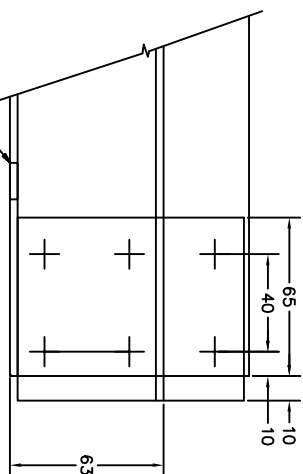
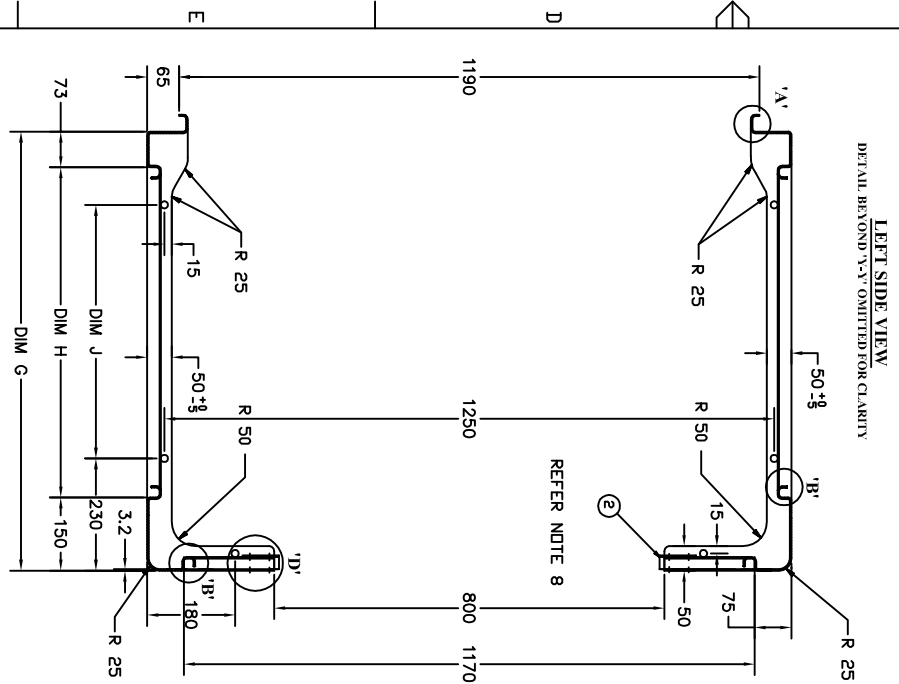

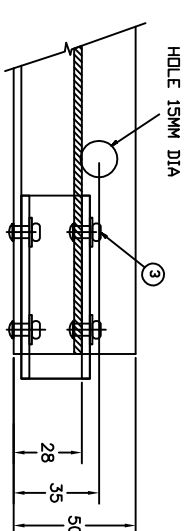
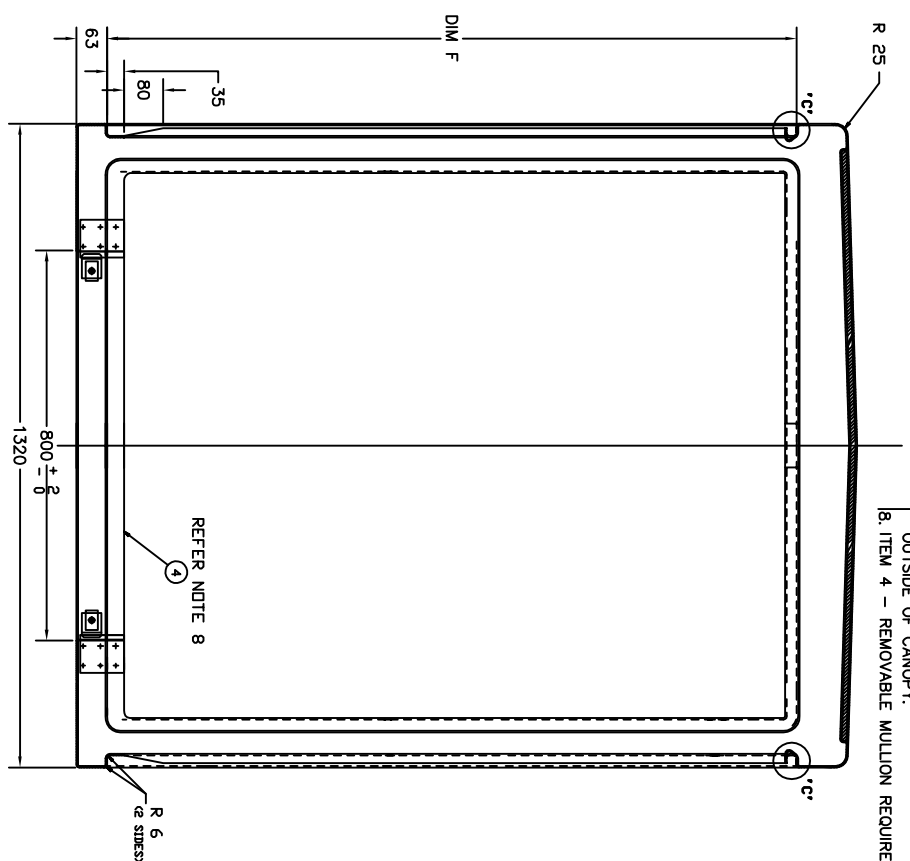
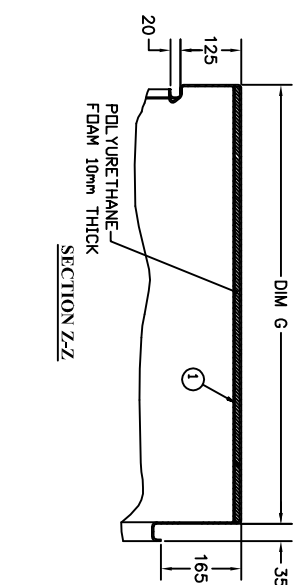
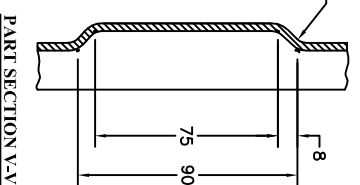
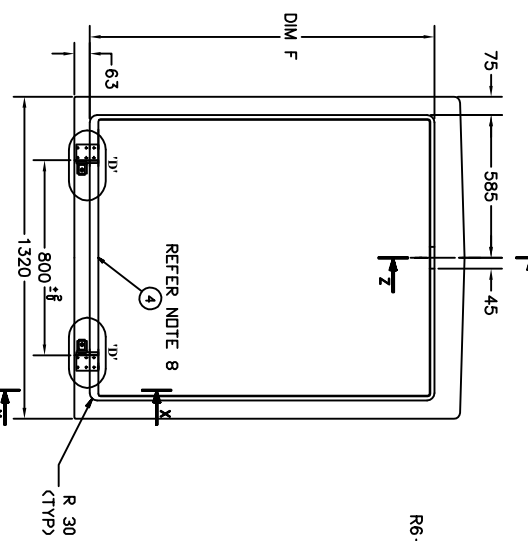
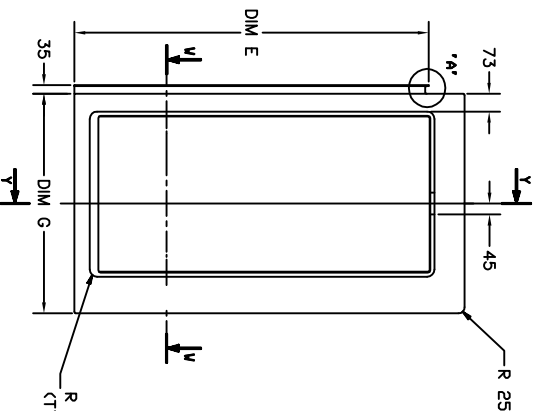
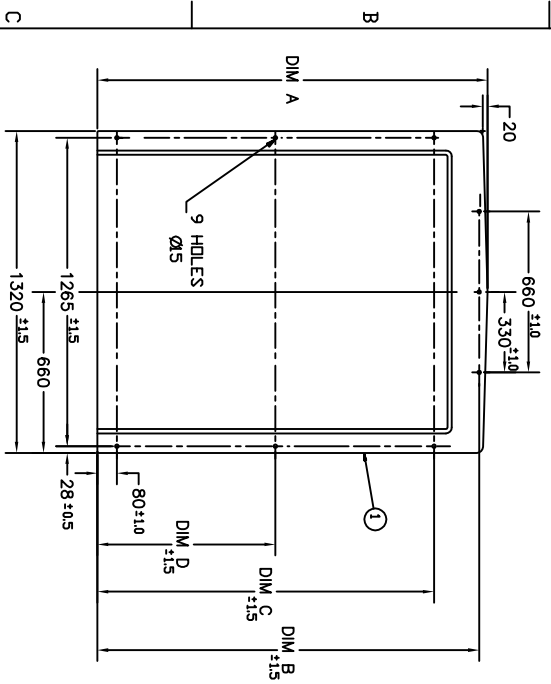




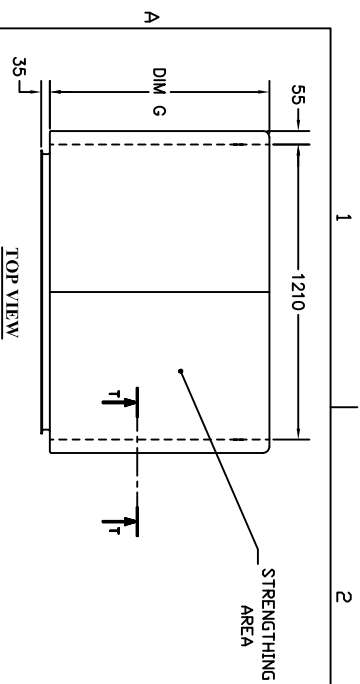


	CUBIC HEIGHT DIMENSIONS	
	SIZE 14	SIZE 16
DIM A	1450	1600
DIM B	1415	1565
DIM C	1230	1380
DIM D	630	730
DIM E	1253	1453
DIM F	1313	1413

CUBICLE LENGTH DIMENSIONS	
HV END	L V END
DIM G 900	770
DIM H 677	547
DIM J 520	390

ITEM NO	VOCAB / DRG	DESCRIPTION	QTY	REFER
1	NA	FIBREGLASS ANCHOR	1	NOTE 2
2	NA	FIBREGLASS ANCHOR PLATE	2	-
3	NA	POP RIVET AL DIA 4.8 (AD612)	12	-
4	NA	FIBREGLASS MULLION	2	-
5	NA	CLAMPING STUD 10MM DIA	2	-
6	NA	MULLION CLAMP PLATE	2	-
7	-	-	-	-
8	-	-	-	-

© This drawing and the copyright therein is the property of Endeavour Energy and may not be copied, reproduced, distributed, loaned or used without the written consent of Endeavour Energy.



STEELWORK DETAILS	264889
DOOR DETAILS	264890
FIBREGLASS CUBICLE ARRGIT	264887
REFERENCE DRAWINGS	

AMENDMENTS		7
A	ORIGINAL ISSUE	
B	DR'N	GSF
	CH'D	GSF
	DATE	01-10-03
	JR No	--
SIZE 14 DIM F, G, H & J CHANGED. HEIGHT NOW 1450MM. DOOR 100MM HIGHER. MULLION CLAMP CHANGED.		
MDEB	GSF	
C	DR'N	GSF
	CH'D	GSF
	DATE	27-02-04
	JR No	--
REMOVABLE MULLION ADDED TO LV END. NOTE 8 MODIFIED.		
MDEB	GSF	

	ORIGINAL SCALE NONE	APPROVED G. Ford
	DRAWN	G. Ford
	DATE	10/08/2001
	CHD	G. Ford

SIZE 14 & 16 PADMOUNT SUBSTATION
FIBREGLASS CUBICLE
HV & LV COMPARTMENTS

AUTHORISED	
W. Isley	
MANAGER ASSET SERVICES	10/08/2001
A3	264891 C
SHEET No 1 OF 1 SHEETS	

NOTES

1. THIS DRAWING TO BE USED IN CONJUNCTION WITH THE RELEVANT Endeavour Energy PDMOUT SUBSTATION CUBICLE SPECIFICATION THE INTERNAL AND EXTERNAL CUBICLE FINISH IS ALSO DETAILED IN THIS SPECIFICATION.
2. ITEM 1 (FIBREGLASS CANOPY) TO HAVE A MINIMUM WALL THICKNESS OF 3.2mm (EXCLUDING GELCOAT).
3. ALL UNSPECIFIED RADI TO BE R6 MIN.
4. TOLERANCE – UP TO AND INCLUDING 300 ±11.0
OVER 300 ±2.0
UNLESS OTHERWISE NOTED.
5. FOR LOCATION & FIXING DETAILS OF DOOR LATCH STRIKER PLATE RETAINING BRACKET & DOOR LOWER SECURITY PLATE & BRACKET REFER DOOR DETAIL DRAWING NO 0769&2.
6. DRILL 12 HOLES Ø4.85 (No 11 DRILL) IN ITEM 1 (FIBREGLASS CUBICLE) TO SUIT ITEM 2 (ANCHOR PLATE).
7. SUITABLE WASHER TO BE FITTED TO ITEM 3 (POP RIVET) ON INSIDE OF CUBICLE PRIOR TO FIXING RIVET IN PLACE. HEAD OF POP RIVET TO BE ON OUTSIDE OF CANOPY.
8. ITEM 4 – REMOVABLE MULLION REQUIRED ON HV AND LV END