AMENDMENTS	
A	ORIGINAL ISSUE
Job No.	WTE1406
B	DESIGN: N/A
	DR'N: TV
	CH'D: MA/MB
	DATE: 13.10.25
A.E.M.: S.P.	
STOCK CODES UPDATED	

NOTES

1. POLE STEPS ARE REQUIRED TO BE INSTALLED FROM 8.3m ABOVE GROUND LEVEL.
   WHERE NORMAL VEHICLE ACCESS IS NOT AVAILABLE (OFF ROAD) POLE STEPS WILL BE REQUIRED FROM 6m ABOVE GROUND LEVEL.
   ALL CONCRETE AND STEEL POLES SHOULD HAVE FERRULES FROM 6m REGARDLESS.
2. MAXIMUM DEVIATION ANGLE APPROXIMATELY 25°, VARIES WITH CONDUCTOR TYPE/TENSION AND ULTIMATE MECHANICAL LOADING ON POST INSULATORS.

ITEM	PART/ASSEMBLY NUMBER	DRG Nos.	DESCRIPTION	QTY
1	-	295703	POLE PRESTRESED CONCRETE	1
2	1000006147	370399	STEP,POLE,HEX,M16x180MM(L),50MM(T),+NUTS	A/R
3	ALP003	398035	INSULATOR LINE POST ASSEMBLY	3
4	-	REFER PROJECT	OPGW ASSEMBLY (NOMINAL SHOWN)	1
5b	AEC-B	051125	EARTH CONNECTION AEC-B	4
5e	AEC-E	051125	EARTH CONNECTION AEC-E	1
6a	ACP001	240600	M20 BOLT ASSEMBLY FOR LINE POST INSULATOR	3
6b	ACP002	240600	M20 BOLT ASSEMBLY FOR LINE POST INSULATOR	3

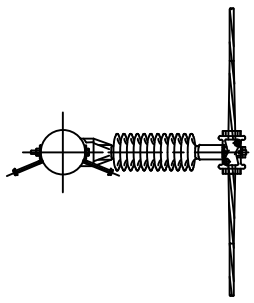

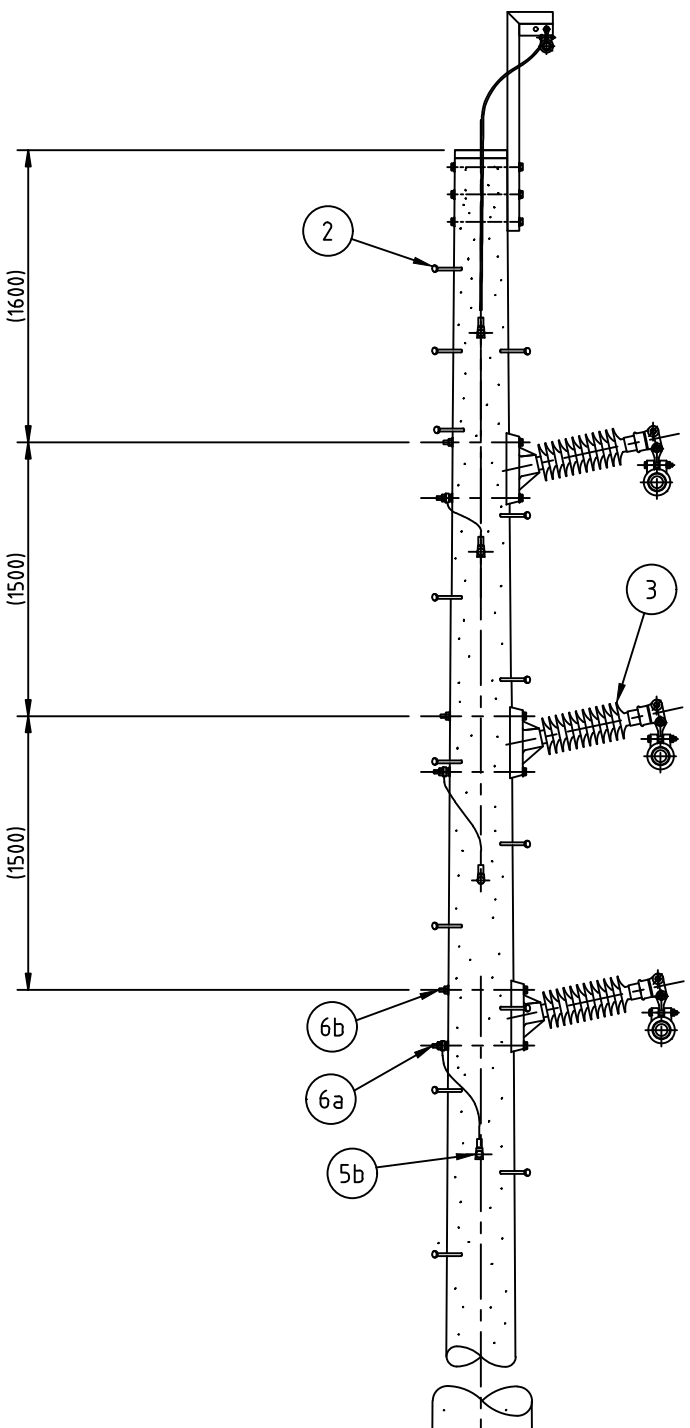

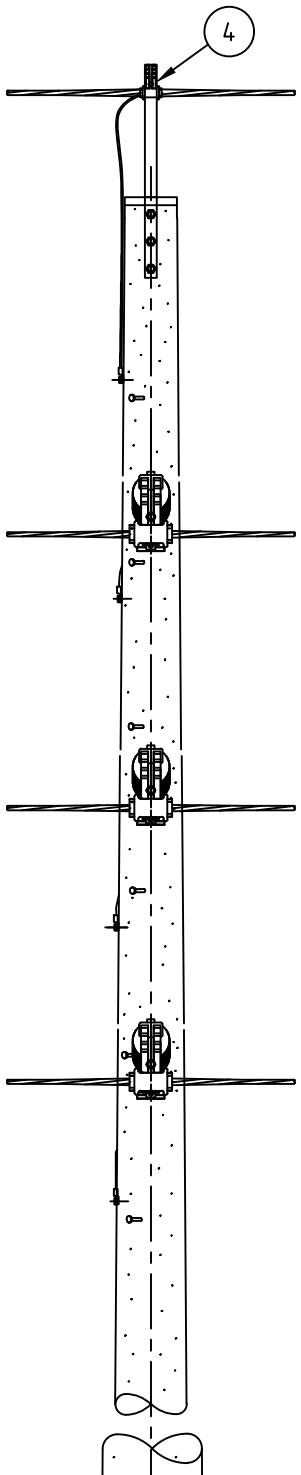

© This drawing and the copyright therein is the property of Endeavour Energy and may not be copied, reproduced, distributed, loaned or used without the written consent of Endeavour Energy.

ORIGINAL SCALE	NTS	APPROVED	S.F.Williams
DRAWN	CP		
DATE	2/09/2014		
CH'D	JB/R.L		

Endeavour Energy

REFERENCE DRAWINGS

DO NOT SCALE
DIMENSIONS IN MILLIMETRES

AUTHORISED
D.Mate
NETWORK MAINS MANAGER 31.10.14

OVERHEAD TRANSMISSION
33/66kV CONSTRUCTION No. 62C
VERTICAL LINE POST

A2P 398000 Rev. B

SHEET No 1 OF 1 SHEETS