AMENDMENTS	
A	ORIGINAL ISSUE
Job No.	
B	DESIGN: N/A
	DR'N: TV
	CH'D: MA/MB
	DATE: 13.11.25
A.E.M.: S.P.	
STOCK CODES UPDATED	

NOTES

1. POLE STEPS ARE REQUIRED TO BE INSTALLED FROM 8.3m ABOVE GROUND LEVEL. WHERE NORMAL VEHICLE ACCESS IS NOT AVAILABLE (OFF ROAD) POLE STEPS WILL BE REQUIRED FROM 6m ABOVE GROUND LEVEL.
   ALL CONCRETE AND STEEL POLES SHOULD HAVE FERRULES FROM 6m REGARDLESS.

ITEM	PART	DRG	DESCRIPTION	QTY
1	-	295702	POLE PRESTRESSED CONCRETE	1
2	1000006147	370399	STEP,POLE,HEX,M16x180MM(L),50MM(T),+NUTS	A/R
3	1000007527	052796	XARM,METAL,3000x152x152MM,6.3MM(T)	1
4	1000000468	054790	BRACE,XARM,ANG,TYPE 3H,GALV,2 X M18	2
5	ALR001	398038	INSULATOR LONG ROD ASSEMBLY	6
6	ALP002	398035	INSULATOR LINE POST ASSEMBLY BONDING	1
7	SEE TABLE	399844	SLEEVE NON TENSION TO SUIT CONDUCTOR	3
8	-	REFER PROJECT	OPGW ASSEMBLY (NOMINAL SHOWN)	1
9a	AEC-A	051125	EARTH CONNECTION AEC-A	2
9b	AEC-B	051125	EARTH CONNECTION AEC-B	1
9c	AEC-C	051125	EARTH CONNECTION AEC-C	2
9d	AEC-D	051125	EARTH CONNECTION AEC-D	2
9e	AEC-E	051125	EARTH CONNECTION AEC-E	1
10a	ACP001	240600	M20 BOLT ASSEMBLY FOR LINE POST INSULATOR	1
10b	ACP002	240600	M20 BOLT ASSEMBLY FOR LINE POST INSULATOR	1
11	ACP006	240600	M20 EYEBOLT ASSEMBLY FOR CROSSARM	2
12	ACP007	240600	M20 BOLT ASSEMBLY FOR CROSSARM	1
13a	ACP009	240600	M16 BOLT ASSEMBLY FOR CROSSARM BRACE	2
13b	ACP010	240600	M16 BOLT ASSEMBLY FOR CROSSARM BRACE	1
14	-	048761	POLE BAND 125kN DIAMETER TO SUIT	2

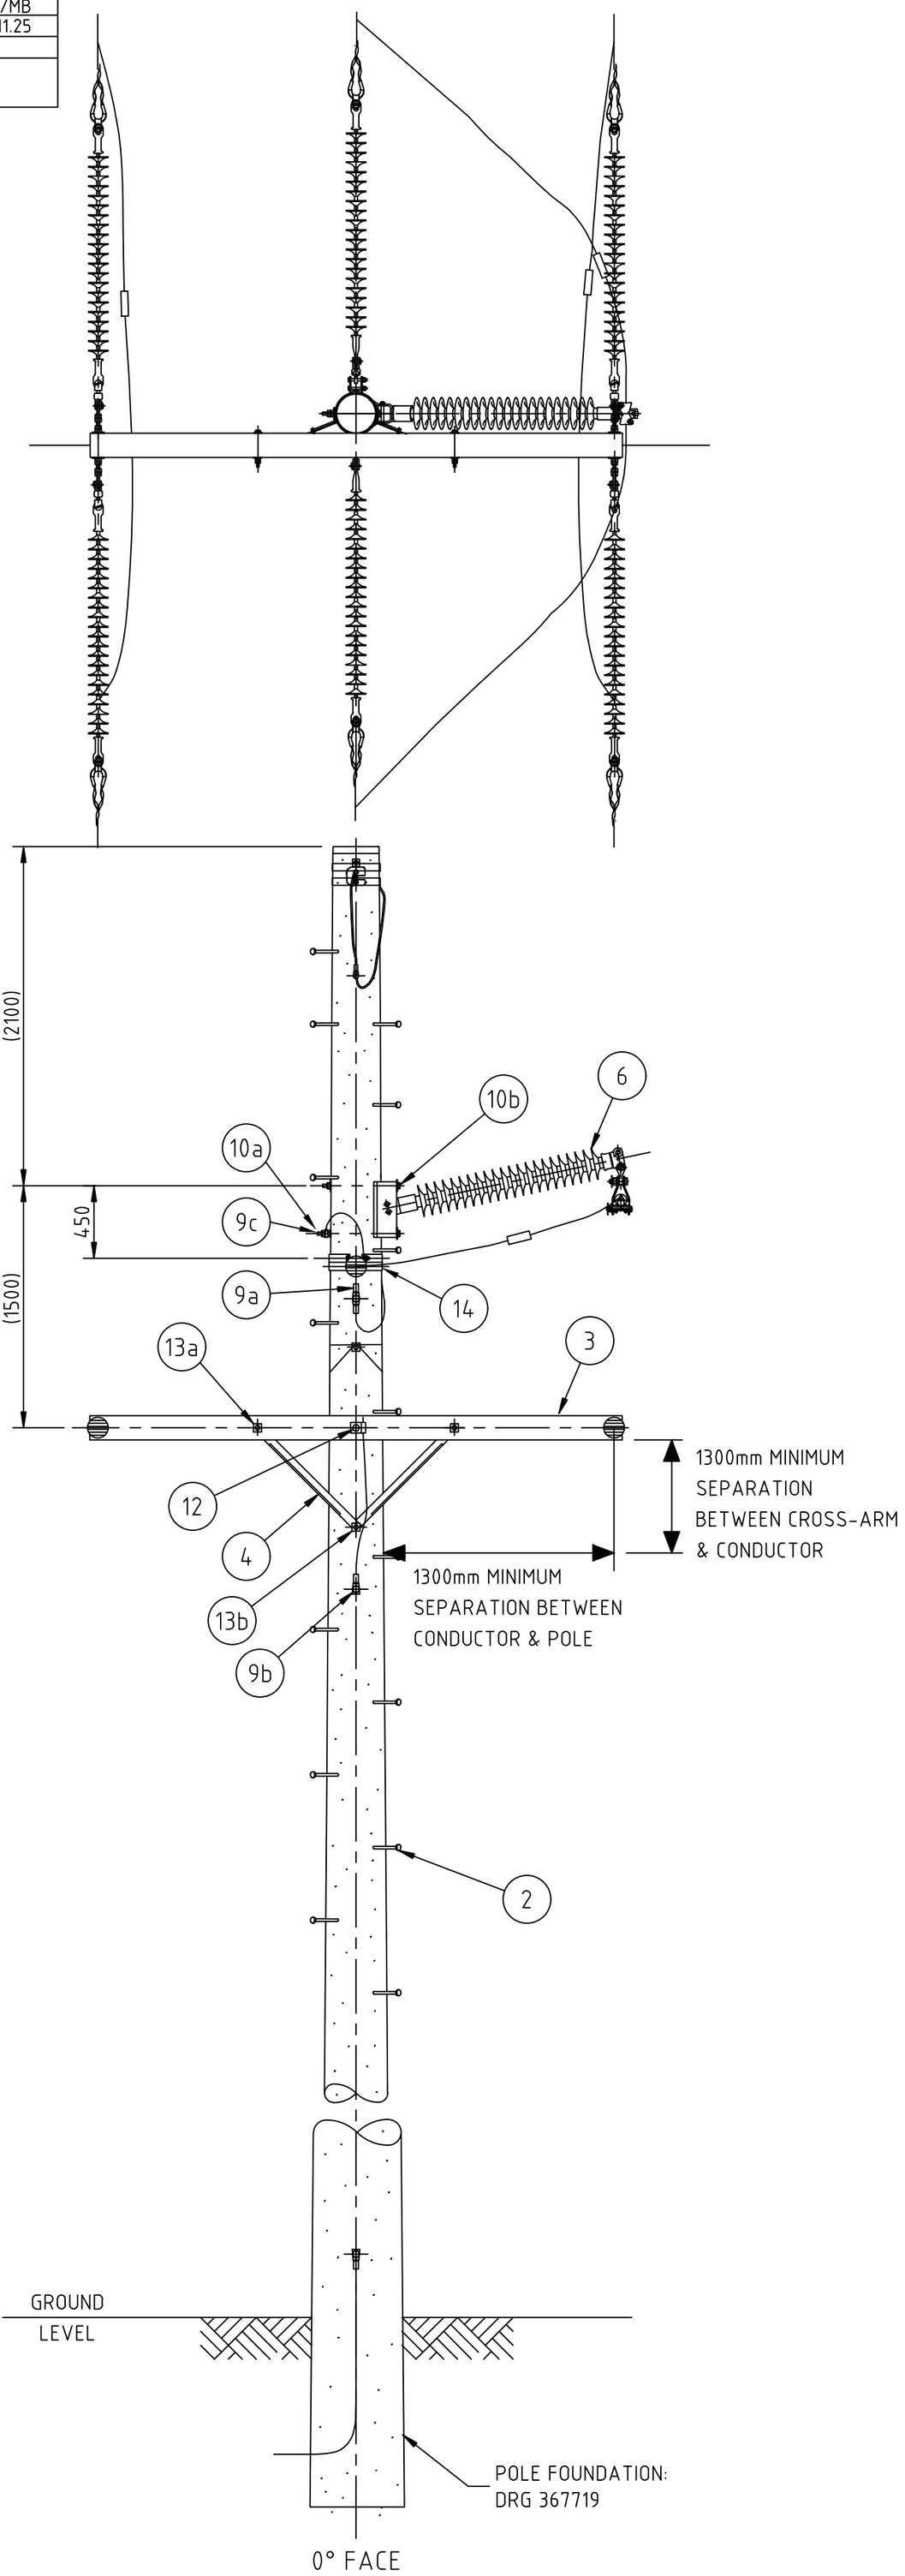

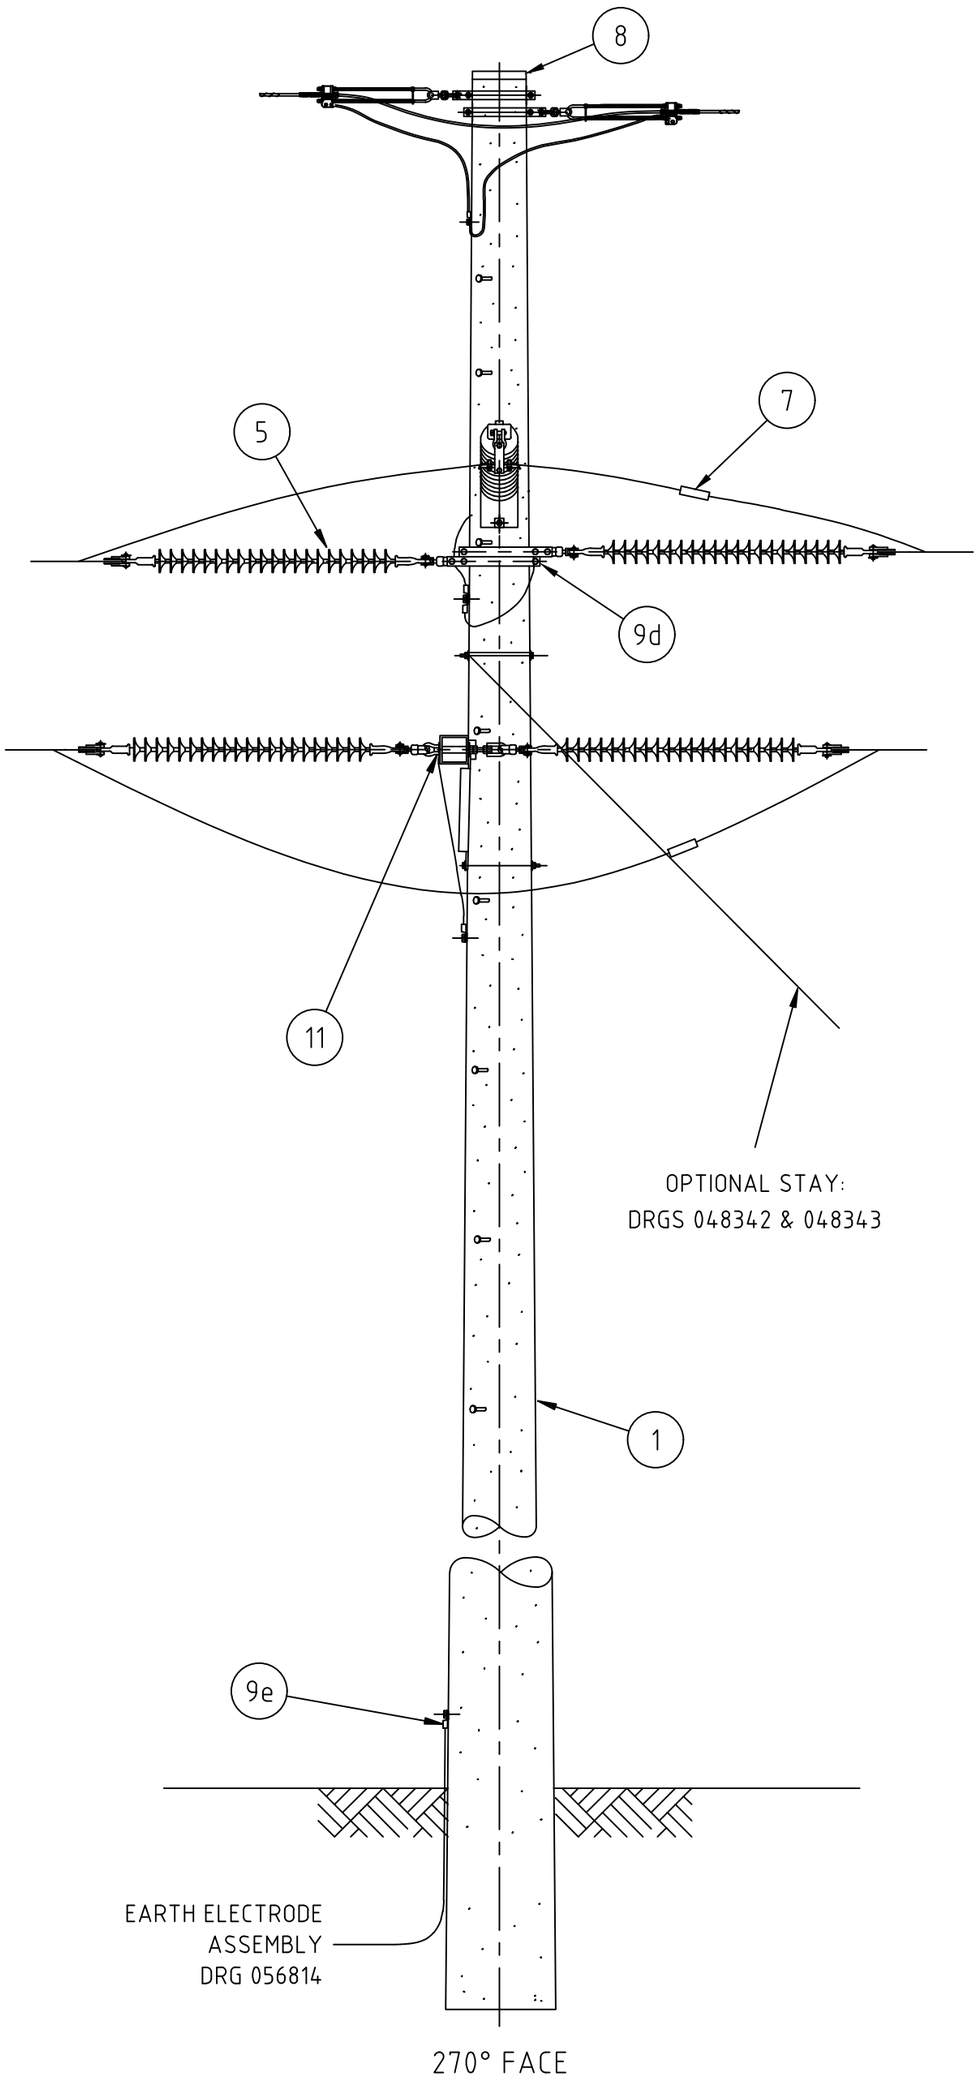

© This drawing and the copyright therein is the property of Endeavour Energy and may not be copied, reproduced, distributed, loaned or used without the written consent of Endeavour Energy.

ORIGINAL SCALE	NTS	APPROVED	S.F.Williams
DRAWN	KT		
DATE	22-05-14		
CH'D	J.B./R.L.		

Endeavour Energy

REFERENCE DRAWINGS

DO NOT SCALE
DIMENSIONS IN MILLIMETRES

AUTHORISED: D.Mate — NETWORK MAINS MANAGER — 31.10.14

OVERHEAD TRANSMISSION
132kV CONSTRUCTION No. 86C
DELTA THROUGH STRAIN

A2P 397797 Rev. B

SHEET No 1 OF 1 SHEETS