


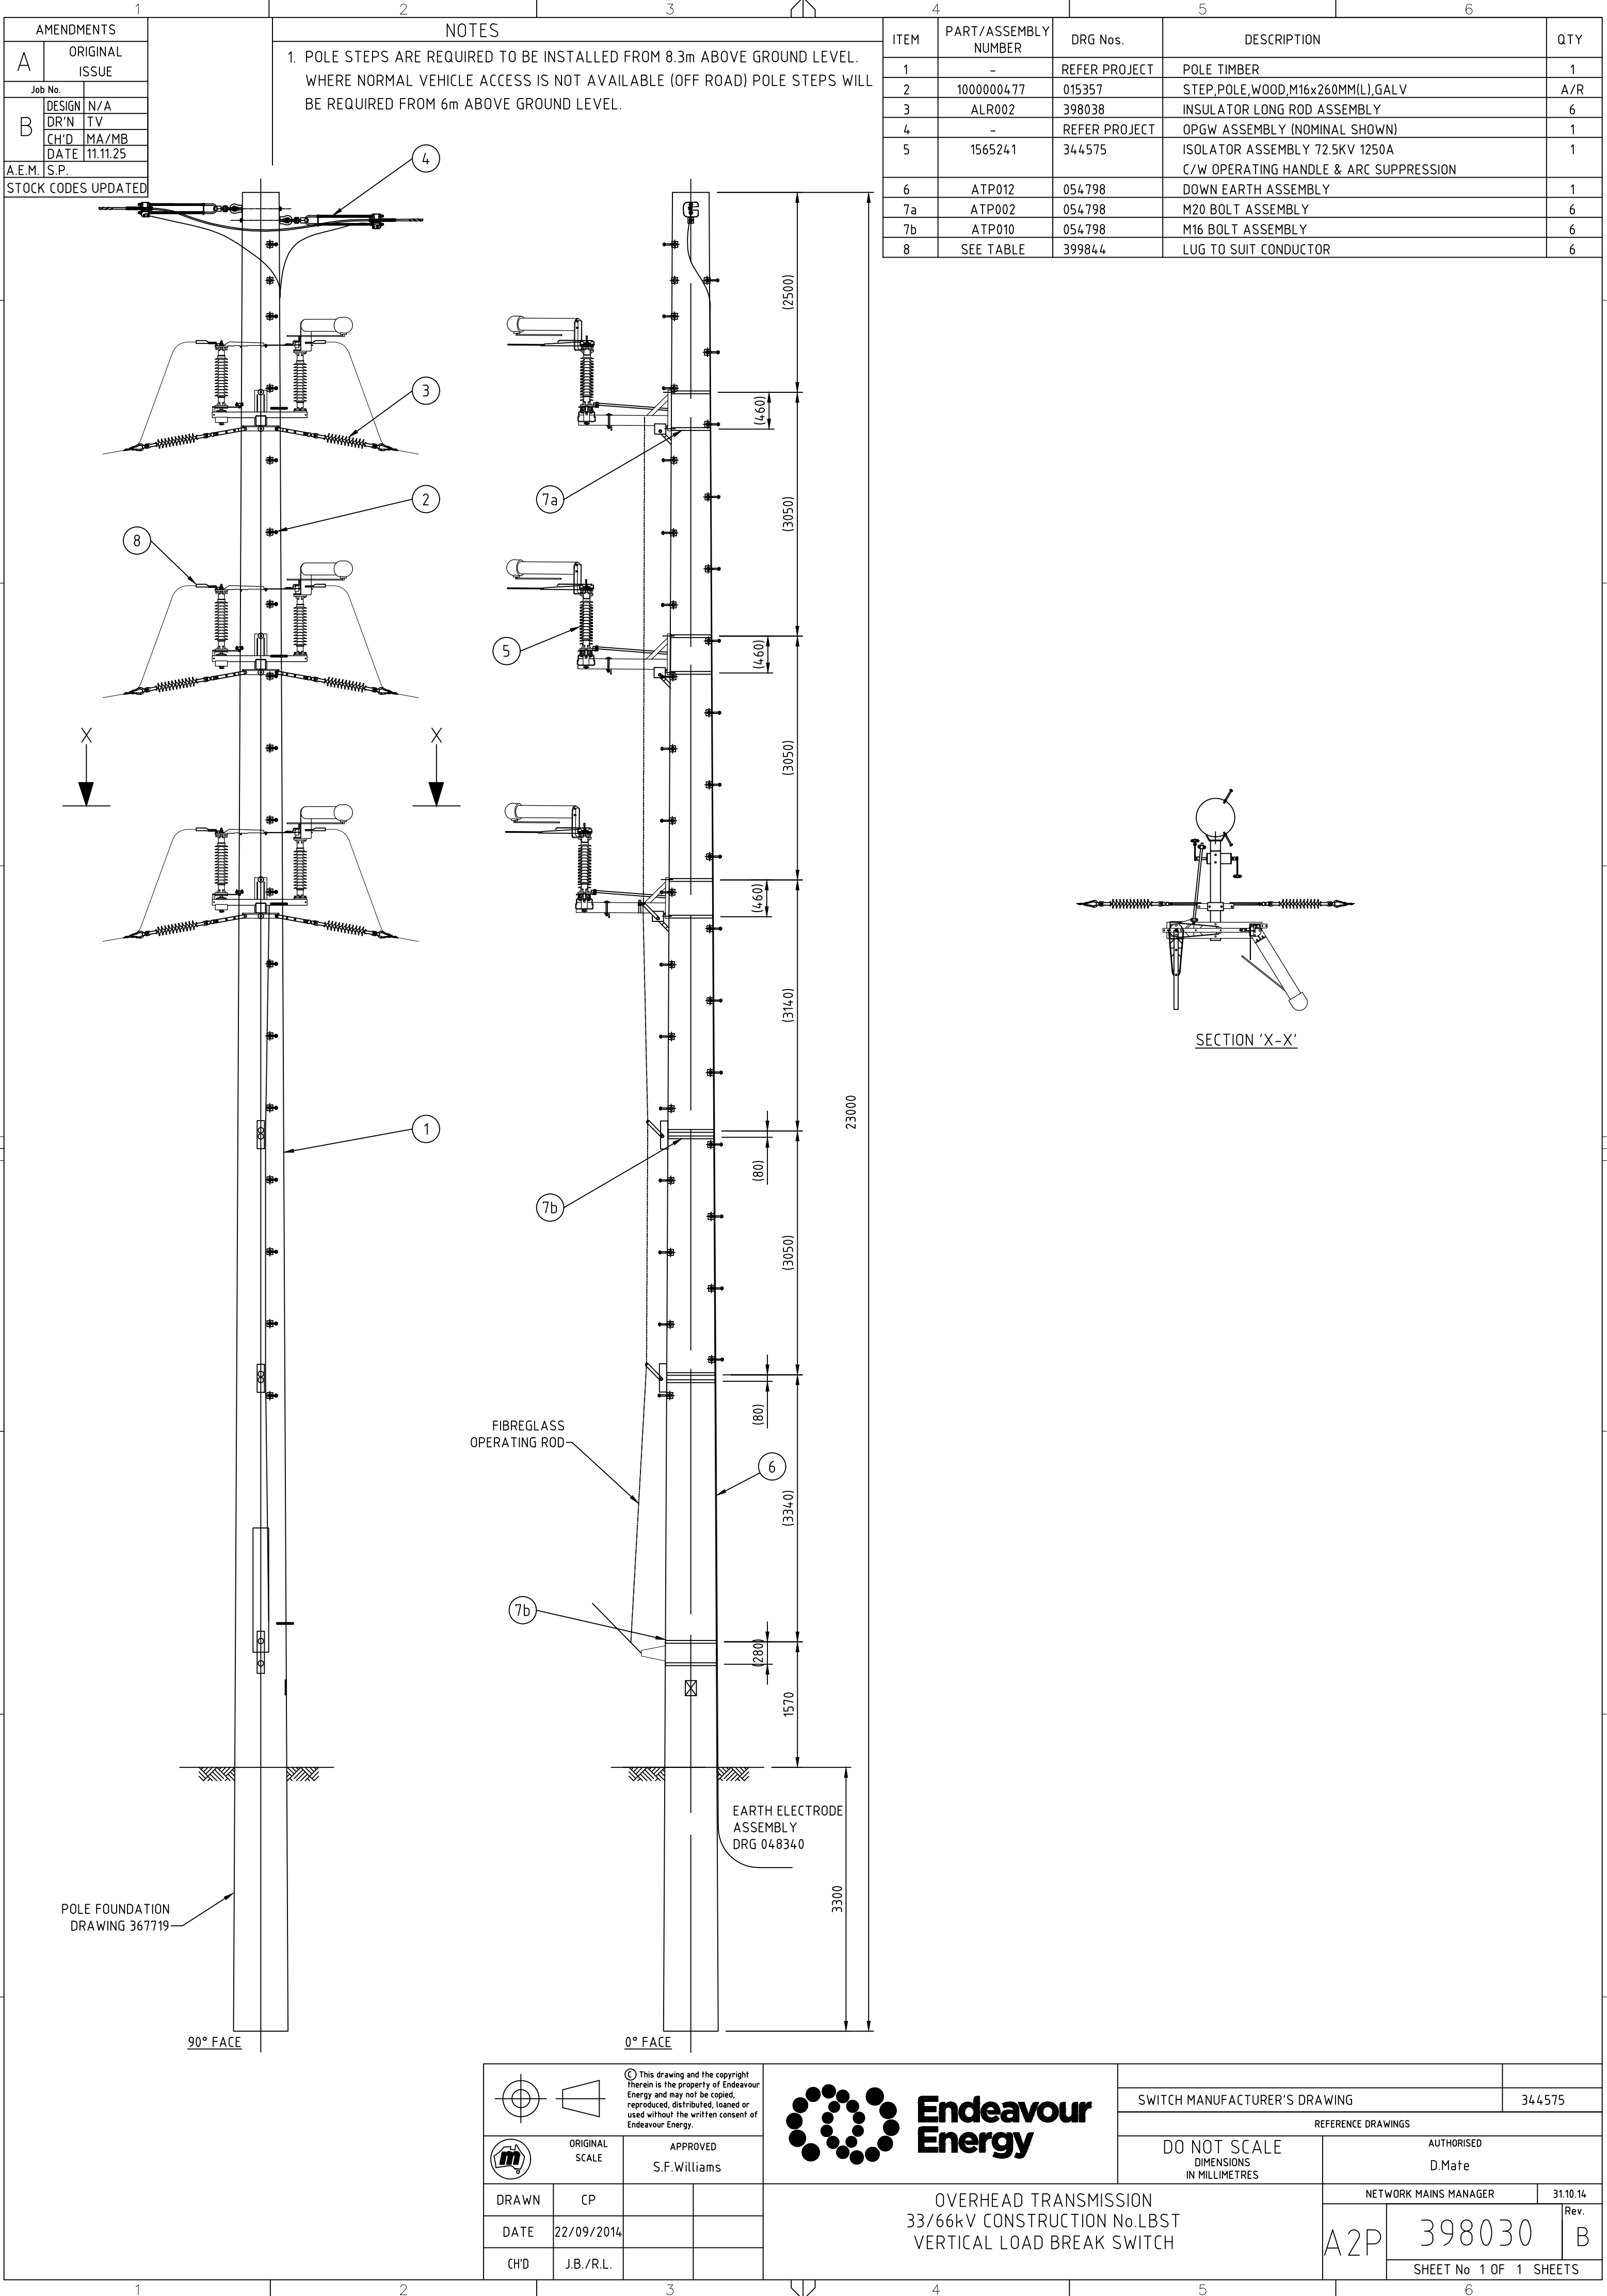

AMENDMENTS	
A	ORIGINAL ISSUE
Job No.	
B	DESIGN N/A
	DR'N TV
	CH'D MA/MB
	DATE 11.11.25
A.E.M. S.P.	
STOCK CODES UPDATED	

NOTES

1. POLE STEPS ARE REQUIRED TO BE INSTALLED FROM 8.3m ABOVE GROUND LEVEL.
WHERE NORMAL VEHICLE ACCESS IS NOT AVAILABLE (OFF ROAD) POLE STEPS WILL BE REQUIRED FROM 6m ABOVE GROUND LEVEL.

ITEM	PART/ASSEMBLY NUMBER	DRG Nos.	DESCRIPTION	QTY
1	-	REFER PROJECT	POLE TIMBER	1
2	1000000477	015357	STEP,POLE,WOOD,M16x260MM(L),GALV	A/R
3	ALR002	398038	INSULATOR LONG ROD ASSEMBLY	6
4	-	REFER PROJECT	OPGW ASSEMBLY (NOMINAL SHOWN)	1
5	1565241	344575	ISOLATOR ASSEMBLY 72.5KV 1250A C/W OPERATING HANDLE & ARC SUPPRESSION	1
6	ATP012	054798	DOWN EARTH ASSEMBLY	1
7a	ATP002	054798	M20 BOLT ASSEMBLY	6
7b	ATP010	054798	M16 BOLT ASSEMBLY	6
8	SEE TABLE	399844	LUG TO SUIT CONDUCTOR	6

OVERHEAD TRANSMISSION
33/66kV CONSTRUCTION No.LBST
VERTICAL LOAD BREAK SWITCH

ORIGINAL SCALE		APPROVED S.F.Williams	
DRAWN	CP		
DATE	22/09/2014		
CH'D	J.B./R.L.		

DO NOT SCALE DIMENSIONS IN MILLIMETRES		AUTHORISED D.Mate	
NETWORK MAINS MANAGER		31.10.14	
A2P		398030	
SHEET No 1 OF 1 SHEETS		Rev. B	