
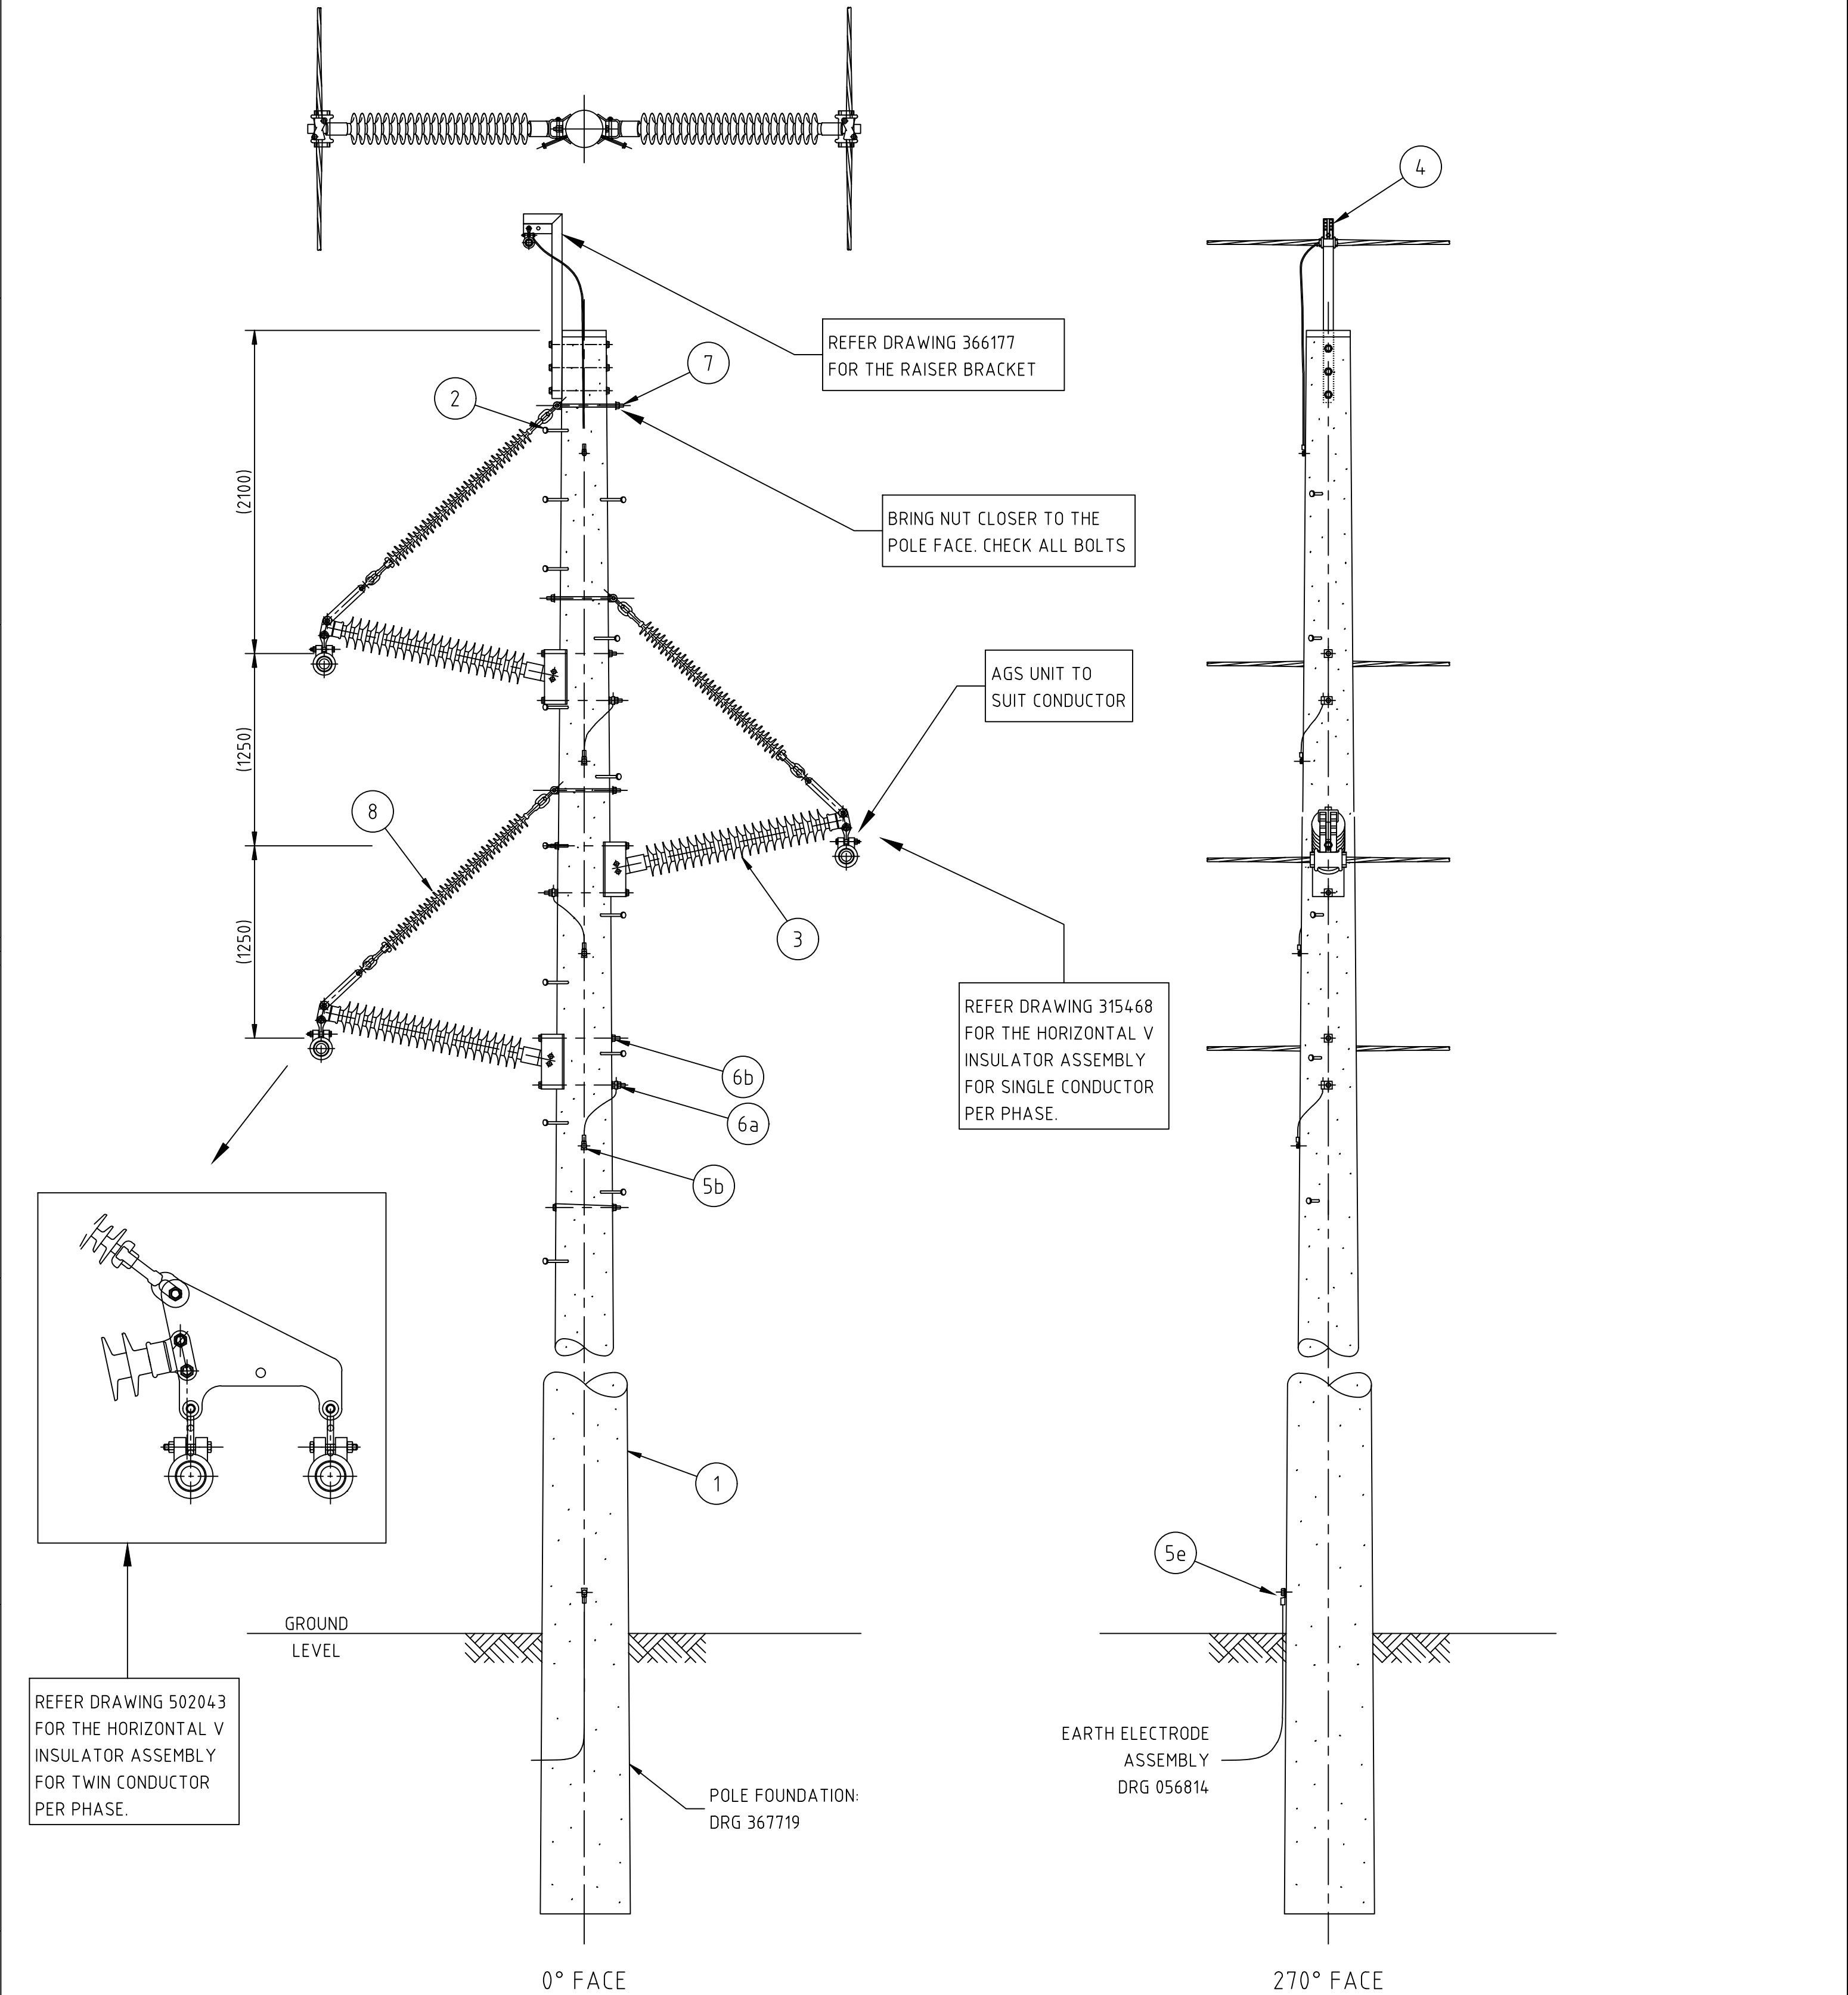



1		2		3		4		5		6	
AMENDMENTS		NOTES				ITEM	PART/ASSEMBLY NUMBER	DRG Nos.	DESCRIPTION		QTY
A	ORIGINAL ISSUE					1	-	295702	POLE PRESTRESSED CONCRETE		1
Job No.		WTE14.06		1. POLE STEPS ARE REQUIRED TO BE INSTALLED FROM 8.3m ABOVE GROUND LEVEL. WHERE NORMAL VEHICLE ACCESS IS NOT AVAILABLE (OFF ROAD) POLE STEPS WILL BE REQUIRED FROM 6m ABOVE GROUND LEVEL. ALL CONCRETE AND STEEL POLES SHOULD HAVE FERRULES FROM 6m REGARDLESS.		2	1561802	370399	POLE STEP		A/R
				2. MAXIMUM DEVIATION ANGLE APPROXIMATELY 15°, VARIES WITH CONDUCTOR TYPE/TENSION AND ULTIMATE MECHANICAL LOADING ON POST INSULATORS.		3	-	315468	INSULATOR LINE POST ASSEMBLY		3
						4	-	REFER PROJECT	OPGW ASSEMBLY (NOMINAL SHOWN)		1
						5b	AEC-B	051125	EARTH CONNECTION AEC-B		4
						5e	AEC-E	051125	EARTH CONNECTION AEC-E		1
						6a	ACP001	240600	M20 BOLT ASSEMBLY FOR LINE POST INSULATOR		3
						6b	ACP002	240600	M20 BOLT ASSEMBLY FOR LINE POST INSULATOR		3
						7	-	-	EYE BOLT ASSEMBLY M20 x LENGTH AS REQUIRED WITH WASHER AND NUT		3
						8	-	-	132kv LONG ROD INSULATOR		3



		ⓘ This drawing and the copyright therein is the property of Endeavour Energy and may not be copied, reproduced, distributed, loaned or used without the written consent of Endeavour Energy.														
		ORIGINAL SCALE NTS	APPROVED A. WICKRAMASINGHE					DO NOT SCALE DIMENSIONS IN MILLIMETRES		AUTHORISED S.PATON						
DRAWN	JP			OVERHEAD TRANSMISSION 132kV CONSTRUCTION No.TBA DELTA HORIZONTAL BRACED POST						ASSET ENGINEERING MANAGER		11.03.26				
DATE	11.03.2026									A2P		537448		Rev.		A
CH'D	MA/MB													SHEET No 1 OF 1 SHEETS		
1		2		3		4		5		6						