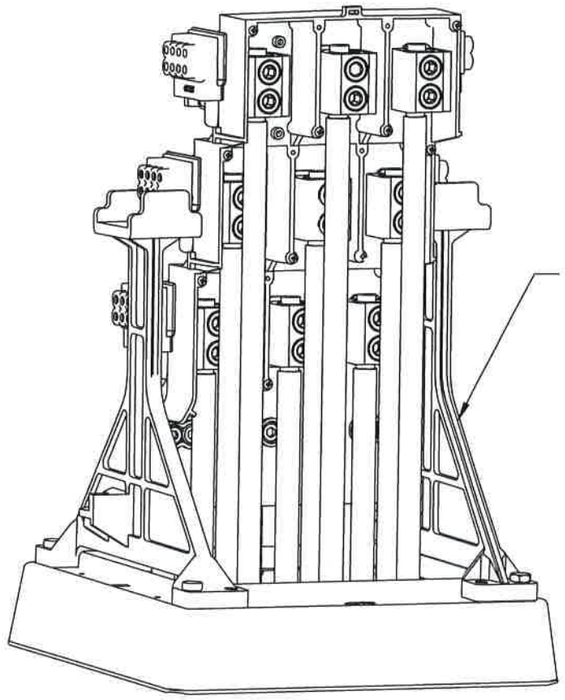

NOTE 1
BOARD IS SUPPORTED BY THE LEGS DURING CABLE CONNECTION.
AFTER CABLE CONNECTION, THE SUPPORT LEGS ARE REMOVED AND STORED FOR FUTURE INSTALLATION.

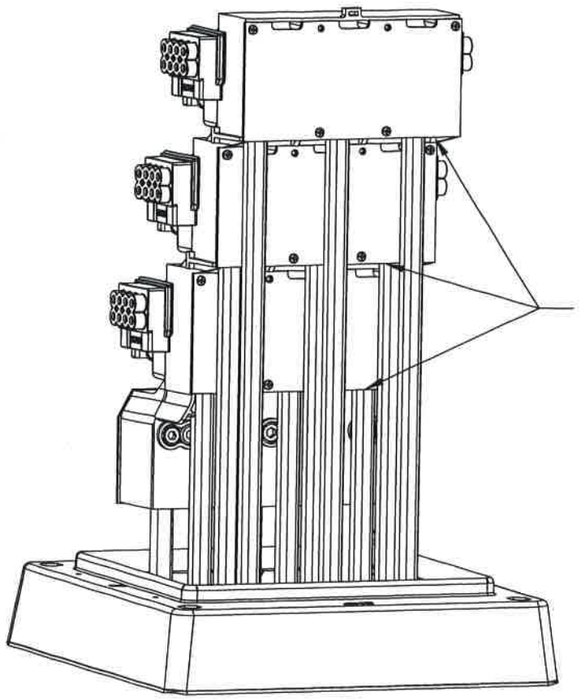

NOTE 5
REAR CLEAR PHASE COVERS ARE TO BE PLACED OVER ASSEMBLED PILLAR KIT TO PREVENT CONTACT WITH LIVE PARTS.

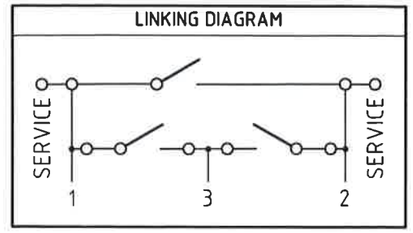

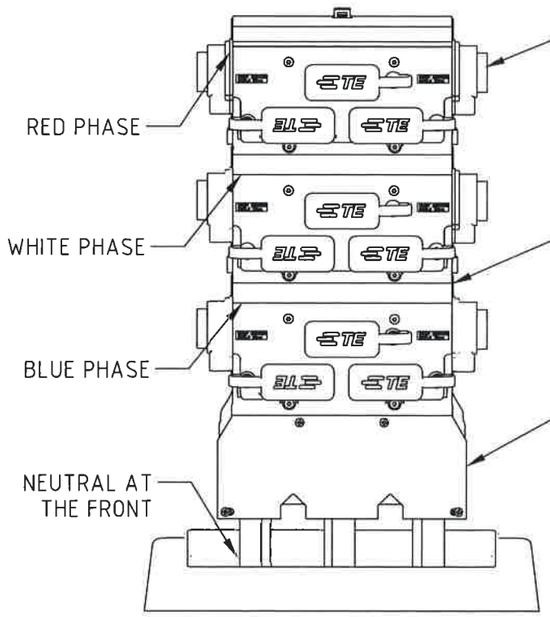

NOTE 2
SERVICE TERMINALS
1x 70mm²
3x 50mm²

NOTE 3
SUPPORT LEGS ARE REMOVED AFTER CABLE CONNECTIONS ARE COMPLETED.

NOTE 4
NEUTRAL BAR COVER

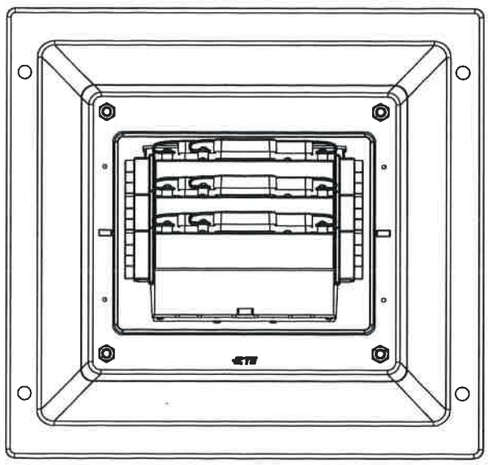

NOTES:

6. THE 3 WAY LINK PILLAR PANEL IS SUPPORTED BY THE INSTALLATION BRACKET WHICH IS SECURED TO THE BASE WITH THE D-HEAD LID SCREWS. THE MAIN AND NEUTRAL CORES THEN FITTED TO PHASE TERMINALS AND TENSIONED TO 50Nm USING A TORQUE WRENCH.
7. EARTH AND NEUTRAL SERVICES ARE BOLTED TO NEUTRAL BAR THEN CLEAR COVER TO BE SECURED OVER THE NEUTRAL TERMINAL.
8. THERE ARE 2 SERVICE TERMINALS PER MAIN PHASE LOCATED ON THE LEFT AND RIGHT. A MAXIMUM OF 4 SERVICE CABLES PER SERVICE TERMINAL.
9. REAR CLEAR PHASE COVERS ARE TO BE PLACED OVER ASSEMBLED PILLAR KIT TO PREVENT CONTACT WITH LIVE PARTS.
10. OPERATING KEYS AND SPARE LINKS ARE PERMANENTLY LOCATED INSIDE PILLAR USING BAG AND CABLE TIE PROVIDED IN THE KIT.
11. REFER TO INS-TAP10550 INSTALLATION INSTRUCTION FOR MORE DETAILS. SUPPLIED WITH EVERY KIT.

© This drawing and the copyright therein is the property of Endeavour Energy and may not be copied, reproduced, distributed, loaned or used without the written consent of Endeavour Energy.

ORIGINAL SCALE

APPROVED

DESIGNED	Adrian G.	DATE	26.03.21
DRAWN	KT		
CHECKED	A.G		

Endeavour Energy

REFERENCE DRAWINGS

DO NOT SCALE
DIMENSIONS IN MILLIMETRES

AUTHORISED/CERTIFIED

TAPPAT 3 WAY 3-LINK PILLAR - TAP10550
URD PARALLELING LINK RECTANGULAR PILLAR INSTALLATION DETAILS

SUBSTATION DESIGN MANAGER

A3

522275

SHEET No 1 OF 1 SHEETS

AMENDMENTS

JOB No	
DESIGN	Adrian G.
DR'N	KT
CH'D	A.G
DATE	01.04.21
APP'D	A.G

A

HISTORY

REVISION A
A3