
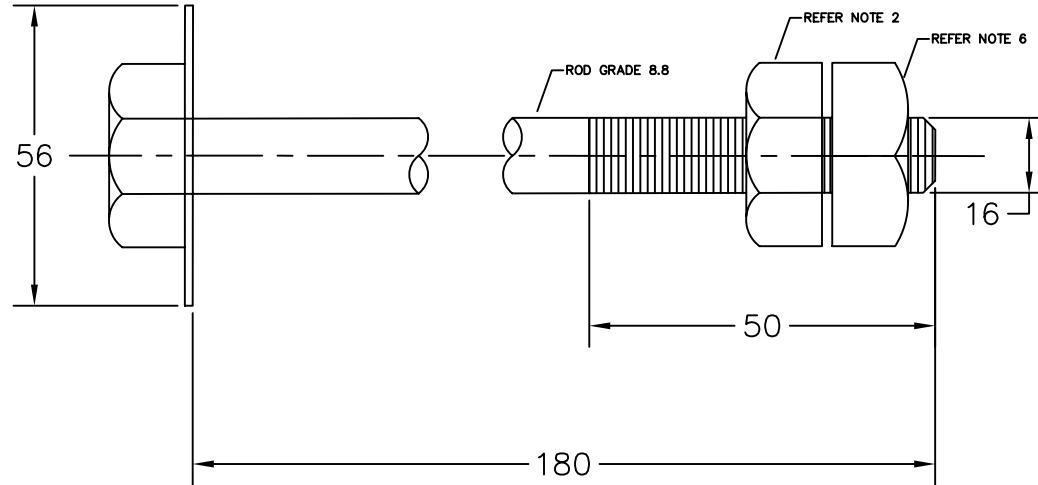


AMENDMENTS	
A	ORIGINAL ISSUE

NOTES

1. BOLTS ARE IN ACCORDANCE WITH AS1111. HOWEVER, THREAD LENGTHS REQUIRED ON M16 BOLTS ARE GREATER THAN THREAD LENGTHS SPECIFIED IN AS1111.
2. TWO NUTS SHALL BE SUPPLIED WITH EACH BOLT. NUTS SHALL BE IN ACCORDANCE WITH AS1112 - 1 SQUARE & 1 HEX HEAD NUT.
3. FINISH SHALL BE HOT DIP GALVANISED IN ACCORDANCE WITH AS4680
4. ALL DIMENSIONS ARE IN MILLIMETRES.
5. THREAD TO CONFORM TO AS1214 HOT DIP GALVANISED COATINGS ON THREADED FASTENERS.
6. THE SQUARE NUT IS FOR USE ON STEEL POLES OR SIMILAR WITH MOUNTING BRACKETS REQUIRING A SECURING NUT.

WIDTH ACROSS FLATS
M16 BOLT: 24mm

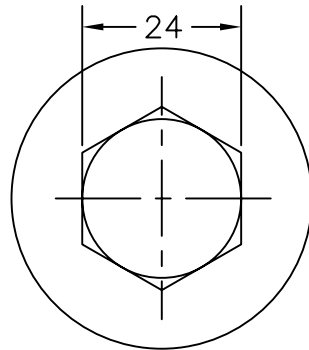

STOCKCODE: 1561802

	© This drawing and the copyright therein is the property of Endeavour Energy and may not be copied, reproduced, distributed, sold or used without the written consent of Endeavour Energy.	REFERENCE DRAWINGS	
	ORIGINAL SCALE NONE	APPROVED D.MATE	DO NOT SCALE DIMENSIONS IN MILLIMETRES
DRAWN P.W.			AUTHORISED J.Perera
DATE 26-07-12			WORK NETWORK MAINS ASSETS 26-07-12
QYD S.A.			SHEET No 1 OF 1 SHEETS
OVERHEAD CONSTRUCTION M16 POLE STEP DETAILS STEEL & CONCRETE POLES			