


1		2		3		4		5		6	
AMENDMENTS		NOTE				ITEM	QTY	DESCRIPTION	REMARKS		
A	ORIGINAL ISSUE	1) SECOND CABLE ONLY REQUIRED IN SPECIAL CIRCUMSTANCES. IF SECOND CABLE IS INSTALLED BA020 AND MA100 QUANTITY WILL BE 2 OFF.				BA020	1	HOOKBOLT 20MM (POLE)	NOTE 1		
B	TITLE AMENDED TO REMOVE REF TO TWIN MAINS	2) NON BREAK AWAY FITTING TO BE USED ON ROAD CROSSING AND BREAK AWAY FITTING (OPTION -B) TO BE USED IN OTHER AREAS.				MA100(-B)	1	CLAMP SUSP. LV NON BREAK/BREAK	NOTE 1 & 2		
CHECKED SD						MA101	1	HOOK LV DOUBLE SUSPENSION	NOTE 1		
DRAWN SC											
DATE 24-07-13											
CHKDGM DMATE											

MAXIMUM ANGLE OF LINE DEVIATION REFER TABLE

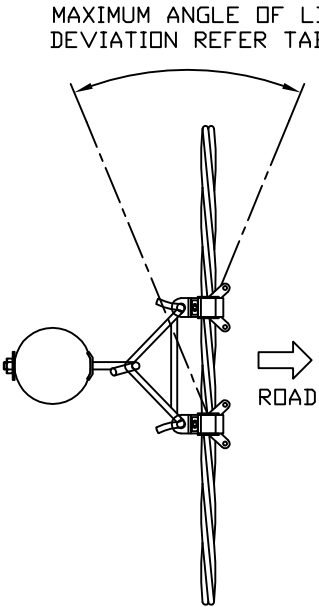

150

200


BA020

MA101

MA100(-B)

-B=BREAK AWAY

LOCATION OF SECOND CABLE IF REQUIRED

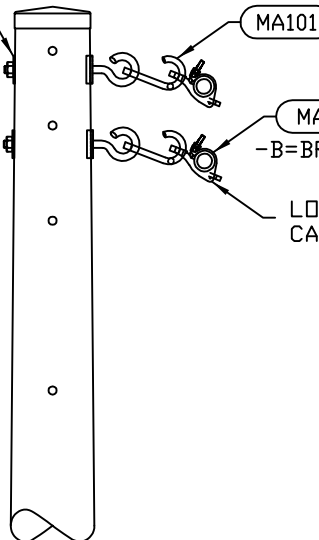

MAXIMUM ANGLE OF LINE DEVIATION REFER TABLE

20°

35°

45°

4X150 -LV20 -100

4x95 -LV9 -100

4x95 -LV8 -60

4X150 -LV19 -60

DO NOT SCALE

DIMENSIONS IN MILLIMETRES

REFERENCE DRAWINGS

APPROVED

W. Isley

MANAGER ASSET ENGINEERING

22/04/09

332007

B

SHEET No 1 OF 1 SHEETS