
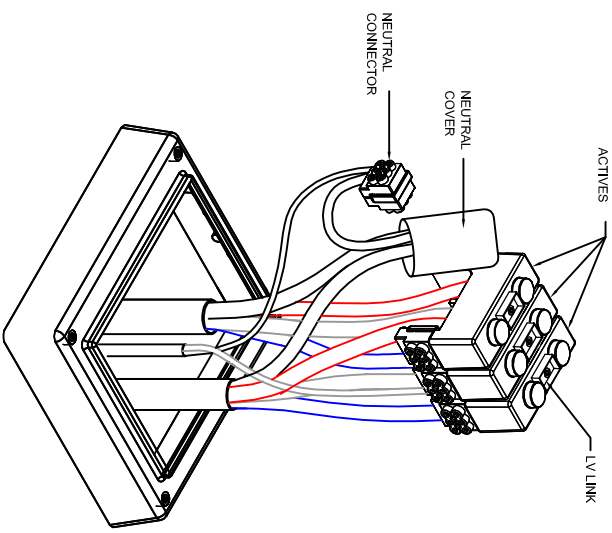
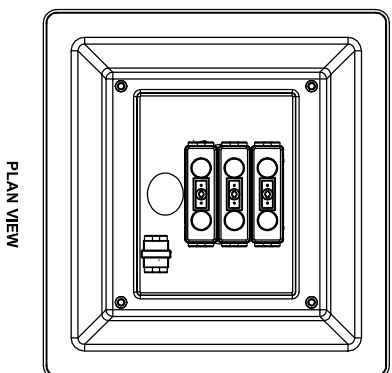


NOTES



1. THE 3 WALK LINK ASSEMBLY PANEL IS SECURED TO BASE WITH SCREWS PROVIDED. NEUTRAL CORES ARE THEN FITTED TO TERMINALS AND TENSION CLAMP BOLTS TO 5mm USING A TORQUE WRENCH.
2. EARTH AND NEUTRAL SERVICES TO BE BOLTED TO NEUTRAL BAR THEN THREE SEPARATE COVERS TO BE SECURED OVER THE NEUTRAL PRIOR TO CONNECTING ACTIVES.
3. EACH MAINS AND SERVICE PILLARS CAN EACH ACCOMMODATE A MAXIMUM OF 4x30 SERVICES ONLY.
4. REAR COVERS ARE TO BE PLACED OVER ASSEMBLED PILLAR KIT TO PREVENT CONTACT WITH LIVE PARTS.
5. OPERATING KEYS AND SPARE LINKS ARE PERMANENTLY LOCATED INSIDE PILLAR USING BAG AND CABLE TIE PROVIDED AND AVAILABLE AS SEPARATE STOCK ITEMS.

[illegible]