
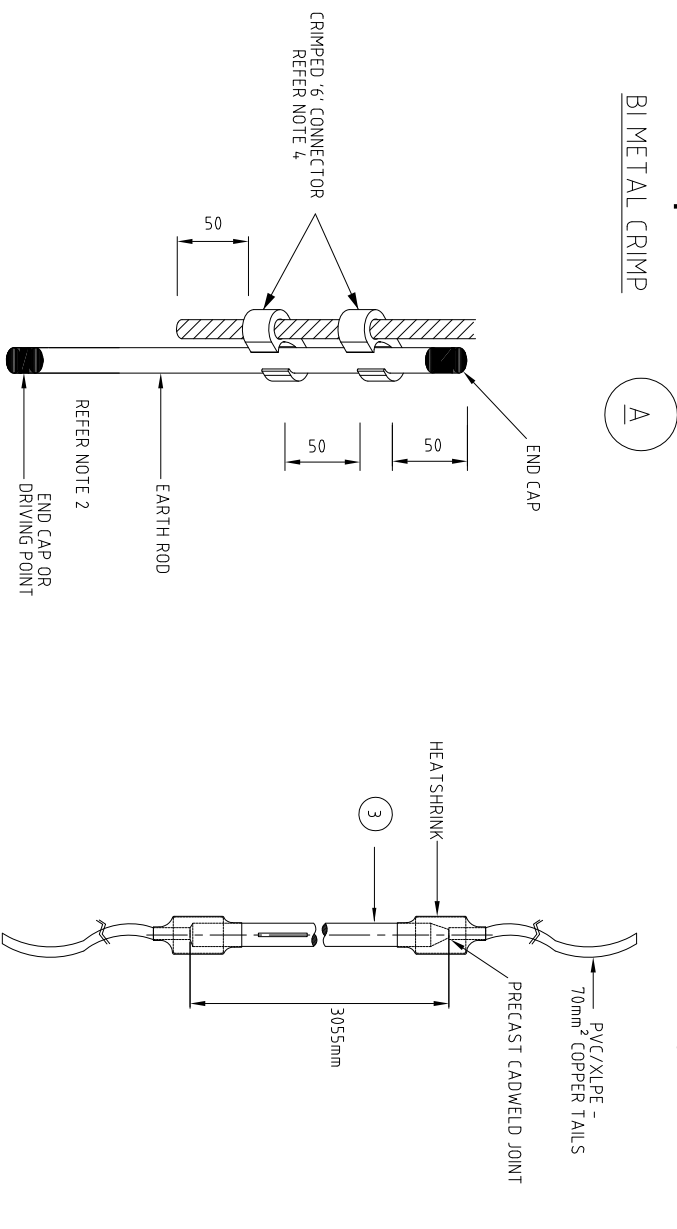
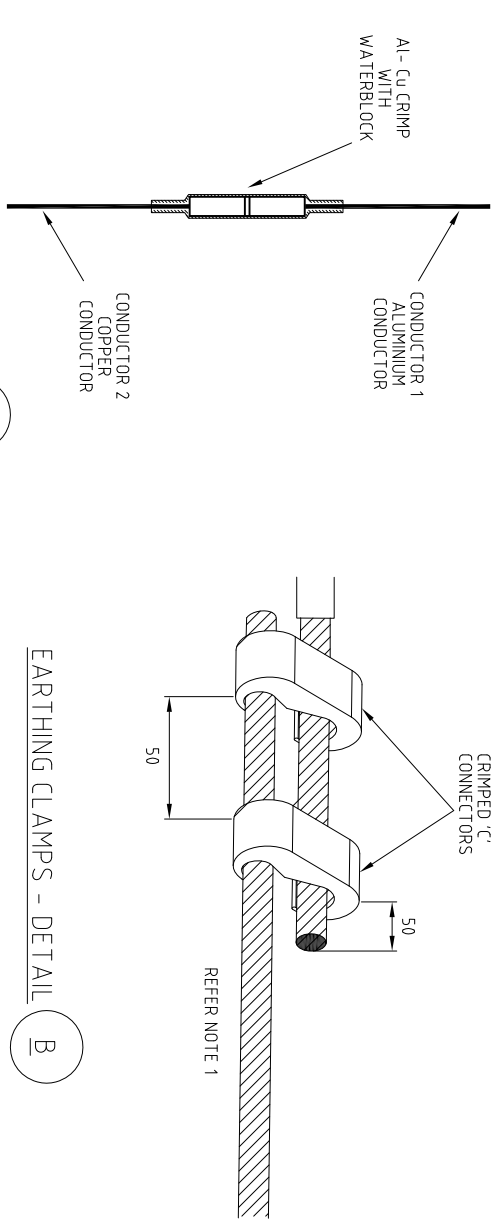


NOTES:

1. EARTHING CLAMPS BETWEEN ERIC TAILS AND COPPER EARTHING SYSTEM AS REQUIRED BY MD0005. DRAWING 0794.61.
2. EARTHING CLAMPS FOR CONDUCTORS IN THE BORE HOLES AS REQUIRED BY MD0005. DRAWING 0794.61.
3. AS DETERMINED BY THE EARTH SAFETY REQUIREMENTS OF EDI 0004, AND THE LIGHTNING PERFORMANCE REQUIREMENTS OF MD0004.
4. WHEN COMPRESSION CONNECTORS ARE USED GRAMP THE EARTH ROD WITH A HEXAGON DIE (UTILUX 38-112 OR EQUIVALENT) PRIOR TO APPLYING GRAMP 6' CONNECTOR. THIS IS TO AVOID RADIAL TWIST.
5. EARTH ELECTRODE TO BE IN ACCORDANCE WITH DRAWING 0794.61 AND DRAWING 010637.
6. BORE HOLE TO BE TO A DEPTH AS REQUIRED BY THE EARTHING DESIGN, IN LINE WITH AS/NZS31000. MD0004.7. DRAWING 0794.61 AND DRAWING 01637. HOLE SHALL BE BACKFILLED WITH THE EARTHING SOLUTION WHERE APPROPRIATE.
7. APPLICABLE FOR TIMBER POLES WITH OVERHEAD EARTHWARE

FOR APPLICABLE LOCATIONS
REFER NOTE 7

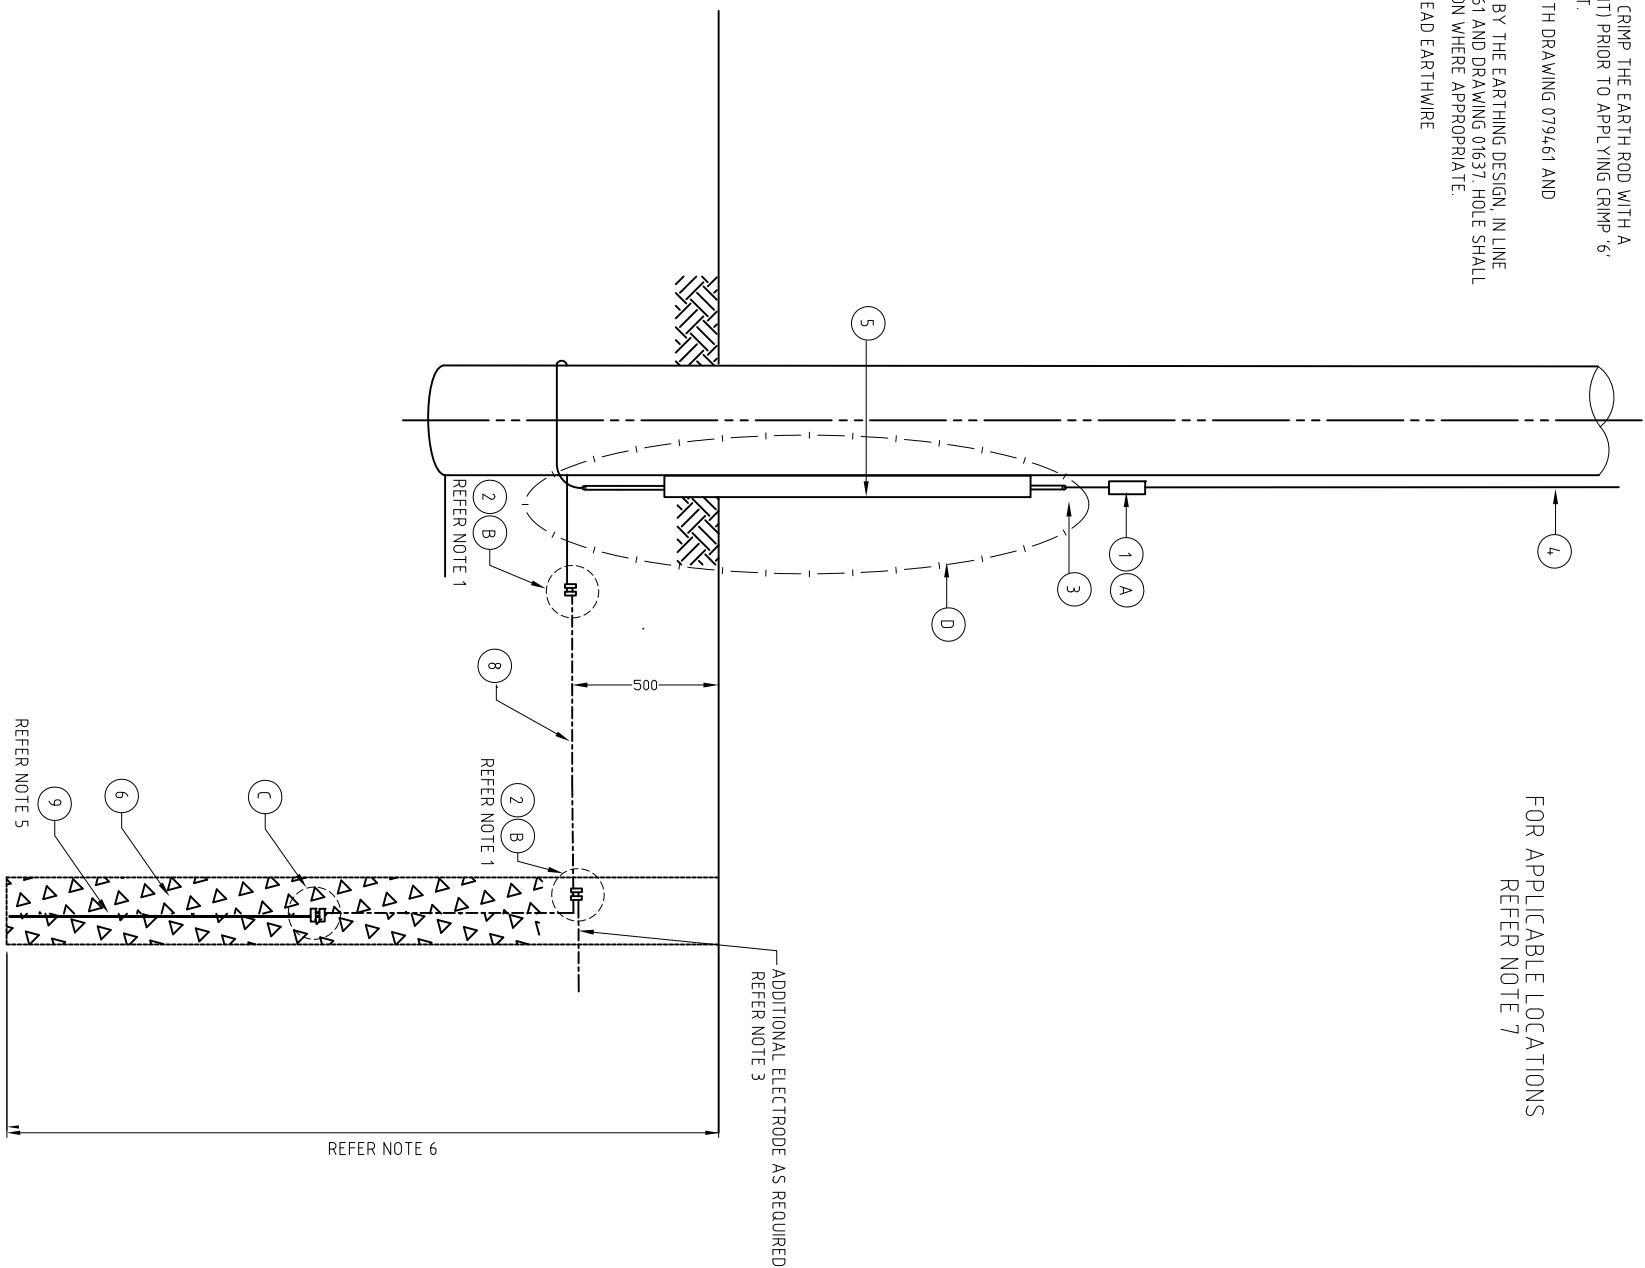

MATERIAL LIST			
ITEM No	DESCRIPTION	STOCK CODE	QTY
1	BIMETALLIC COMPRESSION CONNECTOR 70mm ² - 95mm ² AL	11566927	1
2	CRIMPED CONNECTOR 'C' TYPE CO/70MM ²	1116870	MIN OF 2
3	70mm ² COPPER CLAD STEEL ELECTRODE ARRANGEMENT	1564582	1
4	CABLE ALUMINIUM 95mm ² SDI PVC BLACK	1564228	1
5	EARTH BAT TEN 3000mm - PLASTIC	1556059	1
6	EARTHING COMPOUND - GOOD EARTH 50KG BAG	1069858	AS REQD
7	CONNECTOR '6' TYPE 70mm ²	1104595	2
8	BARE COPPER FOR DEEP ELECTRODE 70mm ²	SZ13771	AS REQD
9	COPPER CLAD STEEL ELECTRODE 2400mm	1020936	MIN OF 1

[illegible]